



ekobom

**Granite sinks
Stainless Steel sinks
PVD sinks**

Luxury is accessible



Welcome to the World of Ekobom

Congratulations on your choice!

You are now the owner of a premium kitchen sink crafted for durability, elegance, and long-lasting performance. Designed with attention to every detail, your product represents the perfect balance of Italian craftsmanship and modern functionality.


Ekobom sinks are engineered to exceed industry standards, combining aesthetic refinement with enduring practicality – the hallmark of affordable luxury.

This booklet will guide you step-by-step through the proper installation, usage, and maintenance of your sink.

For best results and to ensure optimal product performance, we strongly recommend reading the entire guide before beginning the installation process.

Topmount Installation Instructions

STEP 1: Remove existing sink. Leave the faucet and drain outlet in place. Shut off water supply valves (usually under sink). Release any water that may be in the supply lines by opening faucet valves (the same way you would normally turn your water on). Let water run until it stops flowing. Disconnect the supply lines from the water supply valves. Disconnect the drain fitting from the waste trap. Remove clips around underside of old sink. Lift sink out with faucet and drain fitting still in place.

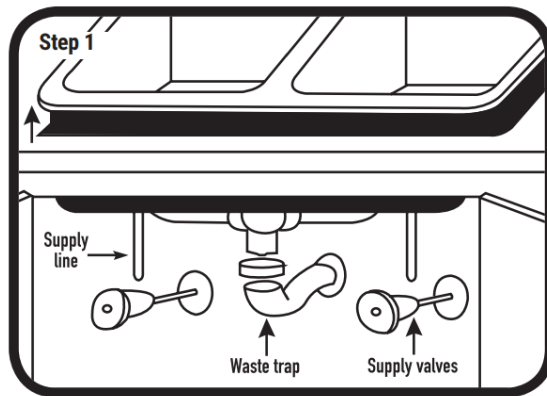

NOTE: The illustrations are a representation of a sink and may differ from the style of your sink. The instructions still apply to your installation.


STEP 2:

OPTION A: Prepare existing countertop

Make sure existing countertop cut-out opening is the proper size. Set the new sink into opening. The sink rim should rest evenly on the countertop.


Slight adjustments can be made using a file or a jigsaw. Use caution to avoid chipping or cracking the countertop while filing or sawing.

Countertop should not be warped in order for sink to fit flush in the opening.

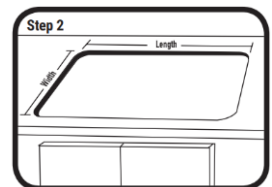


OPTION B: Prepare a new countertop using the sink as a template

Carefully place the sink upside down on the countertop at the desired position. Trace the outline of the sink onto the countertop. Do not cut along this line. Draw a line 1/2" (12.7mm) inside the sink outline. Measure the cut-out line you just drew and compare to all sink dimensions. The cut-out should be approximately 1" (25.4mm) smaller than the overall sink dimensions. Verify both measurements. Drill a pilot hole inside the cutting line. Using a jigsaw, cut along the inside line to create the opening in the countertop.

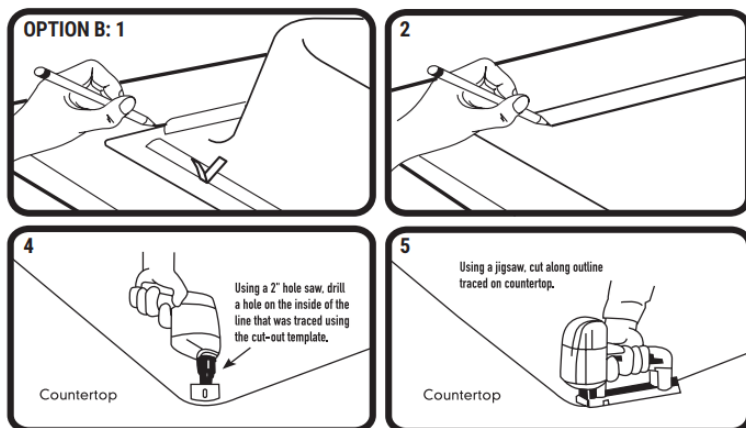


OPTION C: Prepare a new countertop using the cut-out template provided

Measure the cut-out line and compare to all sink dimensions. The cut-out line should be 1" (25.4mm) smaller than the overall sink dimensions. Place template on countertop. Trace completely around the edge of the template directly onto your countertop. Drill a pilot hole inside the cutting line. Using a jigsaw, cut along the line to create the opening in the countertop

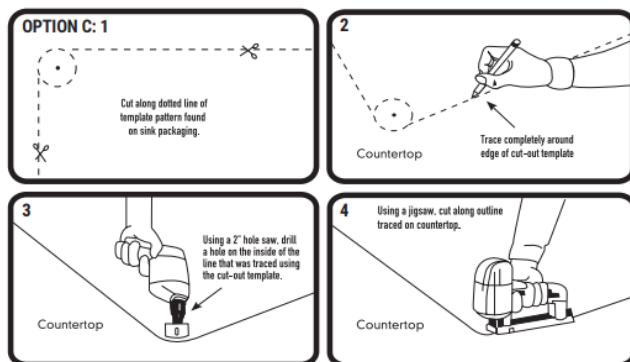


STEP 3: Knocking Out faucet/accessory holes (Must be done before installing sink)

If your sink already has the proper number of holes needed, you can proceed to Step Four. If additional holes need to be knocked out, place the sink upright on a stable workstation (a workbench or the floor). Do NOT place the sink in the countertop to knock out the holes, as damage could occur such as cracking or breakage. Locate the round stickers on the ledge of the sink. These stickers represent the locations of the partially drilled holes. With a hammer and punch or nailset, you can knock out the partially drilled holes needed for faucet and accessories. You will then use a file (ex: rattail type) to smooth away any rough surface in the holes. Note: any additional holes beyond the partially drilled ones noted on this sink are considered modifications and any problems associated with these holes are not covered by the warranty

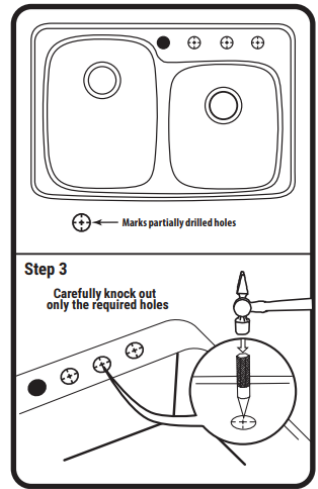


STEP 4: Install accessories

To simplify installation, we recommend the installer attach faucets, strainers and accessories at this time. When fitting the drain to the sink, take extra care not to overtighten. Overtightening can add a mechanical stress in the region of the drain hole which could damage or crack the sink. We recommend the screw fitting be hand tight plus one eighth turn. Caution: Use only Stain-Free Plumber's Putty

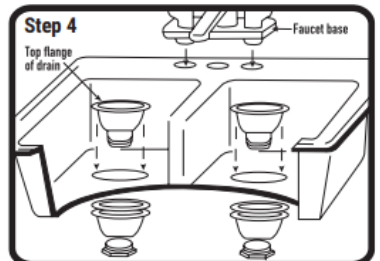


STEP 5: Mounting Brackets

Assemble the mounting clips and bolts as shown in the diagram

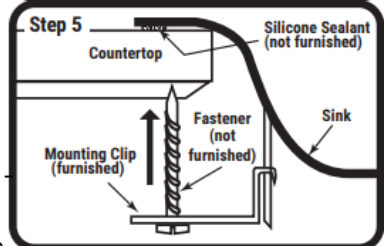

STEP 6: Seal countertop

Place a generous bead of silicone sealant around the perimeter of countertop cutout. This will ensure that the sink is completely sealed to the countertop.

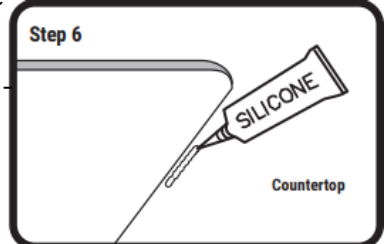

STEP 7: Place sink in opening

Lift sink, turn face-up and lower into the countertop opening. Wipe excess sealant with a wet cloth. Refer to sealant instructions for cure time.

STEP 8: Final Steps


1. Connect and tighten hot and cold faucet supply lines, strainer, drain and trap assembly. Note: Depending on the location of sink drain holes, it may be necessary to adjust the drain pipe fittings under the sink to accommodate the new sink installation.
2. Turn on water supply and examine all connections for leaks. If leak appears, tighten joint slightly. Do not overtighten.
3. With stopper in place, fill sink and examine area under sink and around drain flange for leaks.
4. Remove stopper and let water drain while examining drain connections for leaks

Undermount Installation Instructions

Professional Installation Recommended: Only use natural stone or a solid surface material like granite, marble, Corian® or Quartz. Have sink and accessory openings cut by a professional. A cutting mistake will be costly. (We recommend comparing the template provided to the sink before cutting the countertop.)

STEP 1: Determine position of the sink

Locate the position of the sink using the template provided and make the cut-out from the countertop. Note: This template will align the edge of the countertop to the tangent of the top radius of the bowl (see illustration). If there is a preference to show more reveal of sink flange (lip), adjustments to the cut out need to be made by installer.

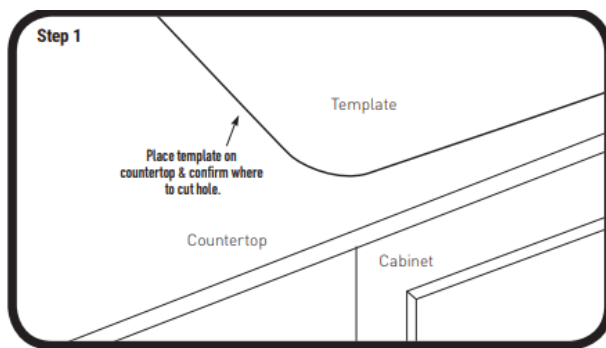

NOTE: The illustrations are a representation of a sink and may differ from the style of your sink. The instructions still apply to your installation.

STEP 2: Determine position of the mounting brackets

Align the bowl under the countertop cut-out and determine the location for the mounting brackets. Mounting brackets have been supplied. Installer will determine attachment method.

STEP 3: Attach the mounting brackets


Attach the mounting brackets loosely to the countertop from underneath, using the fastener and attachment method recommended by the countertop supplier

STEP 4: Apply silicone sealant or plumber's putty

Apply a continuous bead around the top flange (lip) of the sink. Caution: Use only Stain-Free Plumber's Putty.


STEP 5: Sink alignment and mounting

Align the bowl with the countertop cut-out from underneath and fully tighten the brackets against the sink flange (lip).

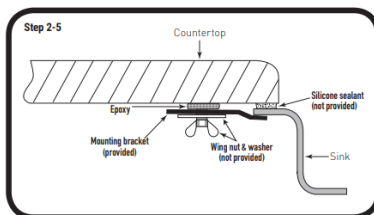

STEP 6: Final Steps

1. Connect and tighten hot and cold faucet supply lines, strainer, drain and trap assembly. Note: Depending on the location of sink drain holes, it may be necessary to adjust the drain pipe fittings under the sink to accommodate the new sink installation.
2. Turn on water supply and examine all connections for leaks. If leak appears, tighten joint slightly. Do not overtighten.
3. With stopper in place, fill sink and examine area under sink and around drain flange for leaks.
4. Remove stopper and let water drain while examining drain connections for leaks

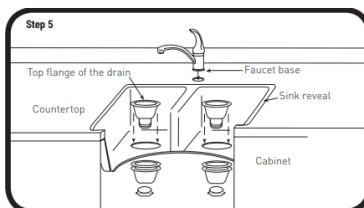

MAINTANCE

Granite sinks

Your Ekobom sink is designed to offer long-lasting performance and enduring beauty. To keep it in optimal condition, please follow the recommended care practices below:

Daily Cleaning

- After each use, clean the sink with a soft sponge and warm water mixed with mild dish soap.
- Rinse thoroughly and wipe dry with a soft cloth to prevent water spots and limescale buildup.
- Regular drying helps avoid mineral deposits and keeps the surface looking pristine.



Limescale and White Stains

- White spots and limescale are often caused by minerals in hard water.
- These can be removed using natural vinegar-based solutions or lemon juice.
- Apply gently with a soft cloth, rinse thoroughly, and dry completely.



Avoid the Following

- Abrasive cleaners, scouring pads, steel wool, soda, or metallic brushes. These may scratch or dull the surface.
- Leaving wet sponges or cloths inside the sink, which can cause discoloration.
- Leaving tea, coffee, tomato sauce, or other staining agents on the surface for prolonged periods.

Composite Sinks (Granite) – Extra Care Tips

Once a week, use a dedicated granite sink care spray to maintain the protective coating and enhance color retention.

Avoid letting dark-colored substances (e.g. ink, curry, beets, etc.) sit on the surface.

Wipe off any stains or residues promptly to prevent absorption into the material.



Thermal Protection

Do not pour boiling water directly onto the sink surface.

Avoid placing hot pots or pans directly into the sink without protective padding.

Sudden temperature changes may cause thermal shock and damage the material.

Occasionally, wipe the sink with a small amount of vegetable oil or mineral oil using a soft cloth.

MAINTANCE

Stainless Steel and PVD sinks


Ekobom stainless steel and PVD sinks are designed for exceptional performance and long-lasting beauty. Proper maintenance helps protect the surface from scratches, stains, and corrosion, ensuring years of satisfaction.

Daily Cleaning

- Rinse the sink with clean water and mild dish soap after each use.
- Wipe dry using a soft cloth to prevent water spots and mineral buildup.
- For deeper cleaning, wipe gently in circular motions with a soft cloth or sponge.

Avoid Harsh Chemicals & Tools

- Do not use abrasive sponges, steel wool, metal brushes, or powder cleansers. These can cause micro-scratches or permanent damage to the surface finish.
- After using any chemical cleaners, always rinse the sink thoroughly with water and dry completely.
- Avoid acidic or alkaline substances such as vinegar, lemon juice, bleach, or silver polish, especially on PVD-coated sinks.

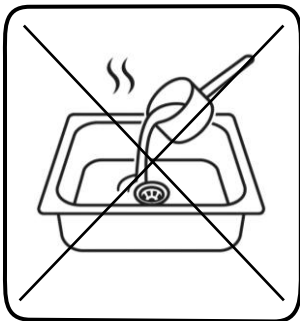

Preventing Stains & Corrosion

- Do not leave wet metal objects (knives, can openers, jar lids) on the sink surface — they may cause rust stains.
- Never store rotting food, fruit acids, or highly salted liquids in the sink for long periods.
- Always clean off cement, paint, or welding debris before using the sink — they may react with moisture and cause damage.

Heat & Environmental Protection

- Avoid placing hot pots or pans directly into the sink. Use a protective mat to prevent thermal shock and PVD discoloration.
- Ensure good kitchen ventilation to avoid buildup of gases (e.g., sulfur or chlorine-based) that may accelerate corrosion.

Removing Limescale & Stains

- For water spots or mineral deposits, apply a mild vinegar solution or a gentle limescale remover using a soft cloth. Rinse and dry.
- Rust or mold stains can be treated with a small amount of toothpaste and wiped gently with a soft cloth.
- Do not leave standing water or food residues on the surface, especially dark liquids like coffee or tea.

Helpful Tip: Use a Sink Strainer

To prolong your sink's life and prevent food waste from clogging your pipes, we recommend using a stainless steel sink strainer with each wash. To ensure long-lasting beauty, the best preventative maintenance is to ensure that the sink is clean and dry when not in use. For best results, opt for a mild liquid soap and a wet cloth to gently clean your sink. Mild abrasives and non-metallic sponges can be used for more aggressive cleaning. Rinse thoroughly and towel dry. Periodically wipe down sink with vegetable or mineral oil to repel calcium or mineral deposits and enhance the natural luster of the sink.

Ekobom warrants that all stainless steel, PVD-coated, and granite composite sinks sold under the Ekobom brand are free from manufacturing defects in material and workmanship under normal residential use for a period of 10 years from the date of original purchase. This warranty applies only to the original end-user purchaser of the product, provided that the sink has been installed properly, used as intended in a standard residential environment, and maintained in accordance with Ekobom's care and installation instructions. In the event of a valid warranty claim, the purchaser must present a copy of the original sales receipt or invoice.

If a manufacturing defect is confirmed, Ekobom may, at its sole discretion, repair or replace the defective product or any component necessary to restore the sink to proper working condition. Replacement of the product does not include the cost of removal, reinstallation, transportation, or any labor charges. Ekobom reserves the right to inspect the installation and product condition prior to authorizing a replacement or repair.

This warranty does not apply to damage resulting from improper installation, misuse, negligence, impact, abrasive cleaning agents, or failure to follow maintenance guidelines. It does not cover scratches, discoloration, water spots, stains, rust caused by external metal objects, or damage due to the presence of harsh chemicals, high mineral content in water, or exposure to corrosive environments such as marine or outdoor applications. Any alteration or repair made without prior written authorization from Ekobom shall void this warranty.

Ekobom shall not be held liable for any incidental or consequential damages, including but not limited to loss of use, property damage, delays, or inconvenience. This limited warranty is exclusive and in lieu of all other warranties, expressed or implied, including but not limited to warranties of merchantability or fitness for a particular purpose, unless otherwise required by applicable law. Local legal rights may vary and this warranty does not affect any statutory rights the consumer may be entitled to under the applicable national law.

To initiate a warranty claim, please contact Ekobom's customer service through our official channels and provide a detailed description of the issue along with photographs and proof of purchase.

Additional Information: For additional information about warranty, products and accessories, please visit **www.Ekobom.it** or call our Customer Service Team at **+393517452615** **info@ekobom.it**

Ekobom modena
Via Risorgimento
14 41121 Modena
Italy
info@ekobom.it

